


FRONT VIEW

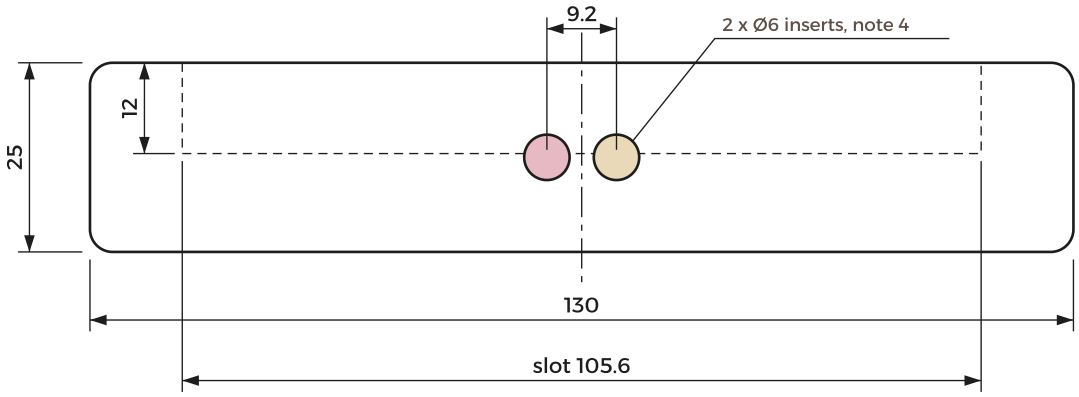


SIDE VIEW

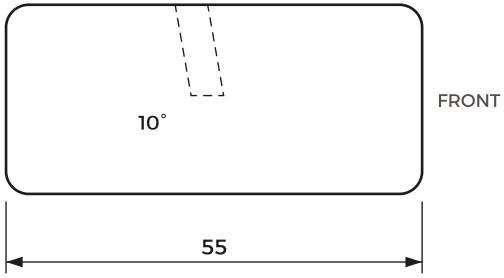

PLAN (TOP) VIEW

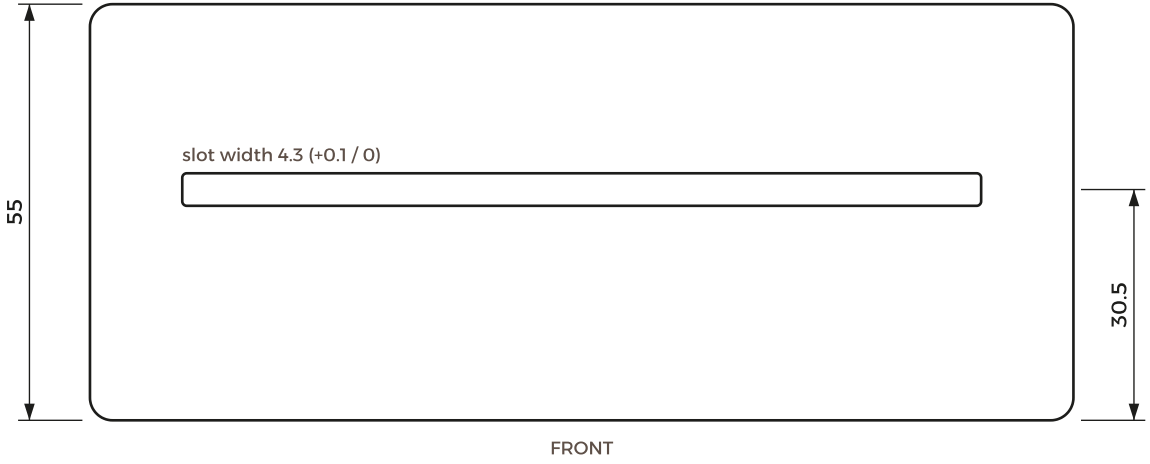

SLOT DETAIL (scale 2:1)

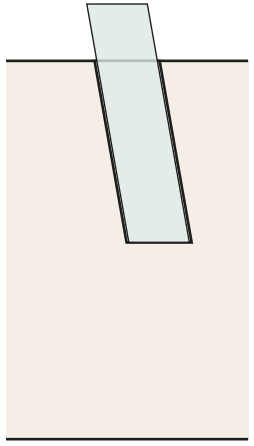

acrylic plate 4 mm, slip fit
slot 4.3 wide x 12 deep, 10° back from vertical

NOTES

1. Material: solid walnut or beech, kiln-dried (8–10% MC). One piece, no visible joints. Grain along the 130 mm length.
2. All external edges radius 3 mm. Sand to P240. Finish: 2 coats hardwax oil (matte), food-safe. No lacquer sheen.
3. Slot: CNC, 4.3 mm (+0.1/0) for 4 mm acrylic. Ends square. Line base of slot with 0.5 mm clear silicone strip.
4. Inserts: Ø6 x 2 mm brass rod, press-fit, sanded flush. Left insert: karkadeh cold-enamel fill (#A3243B) — the second dot.
5. Underside: 4 x Ø10 cork pads. Laser-mark 'tany' + batch number on the underside only.

General tolerance ISO 2768-m. Dimensions in mm. Projection: first angle.

tany	Counter stand base
Overall 130 x 55 x 25 mm	
Scale 1:1 (A4) Units mm Rev A 2026-11-22	
Tany stand system, for fabrication quotes	

ملاحظة للورشة: خشب جوز أو زان مصمت، الحواف مدوّرة ٣ مم، تشطيب زيت شمع مطفي. المجرى بزاوية ١٠° لورا.